


Key

1. Metal deck.
2. Enviroflex vapour control layer fully sealed to penetrating pipe using double sided butyl adhesive tape.
3. Envirotech polyurethane insulation type FF mechanically fixed.
4. Envirotech EVA 1.2mm single ply membrane, by mechanical attachment.
5. Hot air welded seam.
6. Stainless steel jubilee clip.
7. Envirotech all purpose sealant.
8. Envirotech pipe boot.
9. For 50mm and 150mm diameter penetrations use metal deck support plate. For penetrations larger than this the metal deck will require framing.

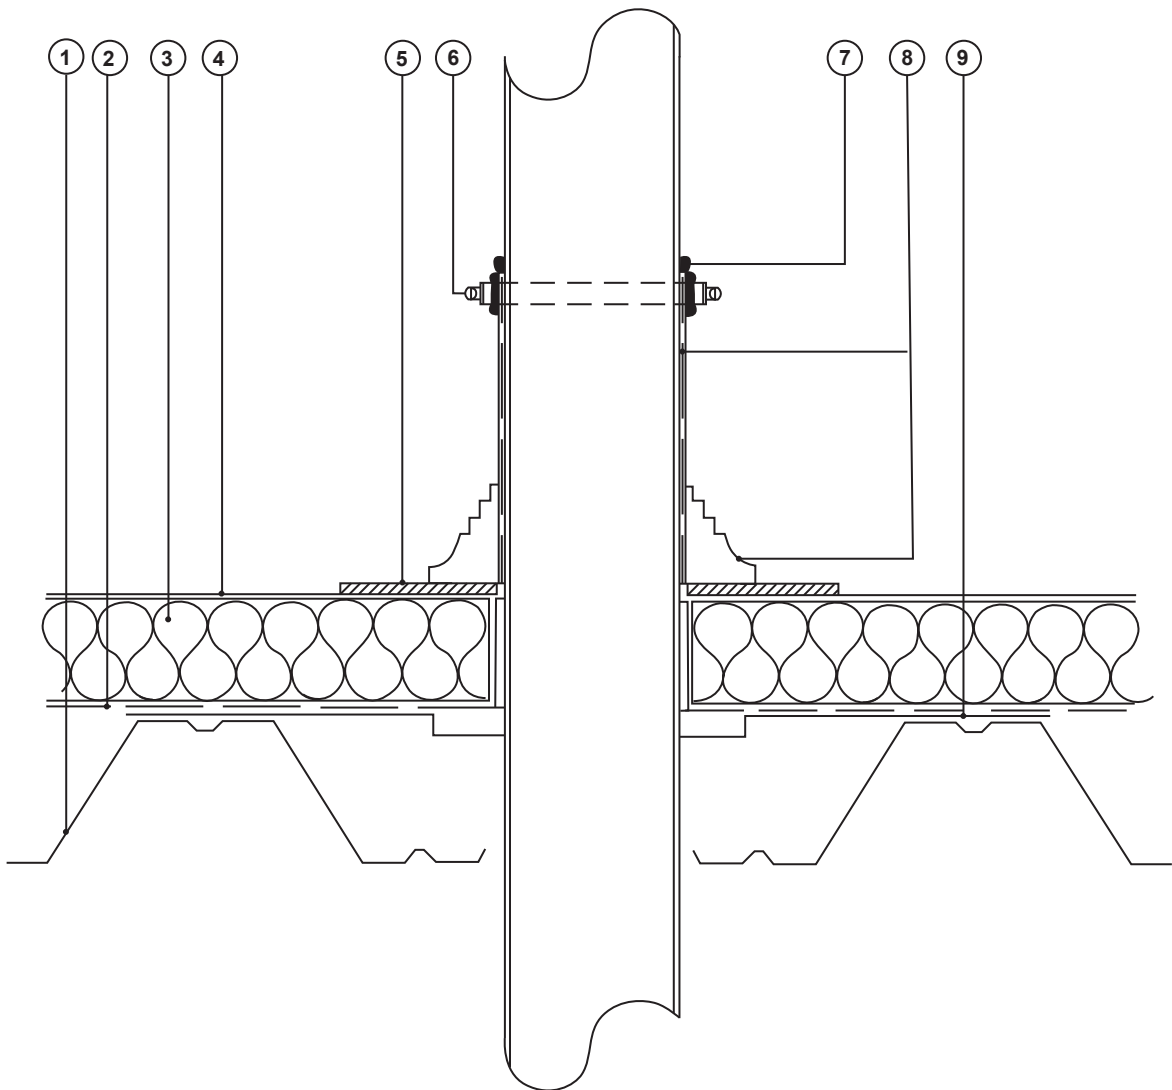

ENVIROTECH EVA

Single Ply Roofing Systems

Interloc Building Solutions Limited
Sybrig House, Ridge Way, Dalgety Bay, Fife, KY11 9JN
Tel: +44 (0)8700 505 925 Fax: +44 (0)8700 505 926

Email: info@interlocbuild.co.uk
www.interlocbuild.co.uk

Detail is valid only when approved by the Architect/Contractor concerned.

Title: Envirotech EVA Cold Pipe Penetration – Pipe Boot

Drawing Ref: ENV-MF-05 Scale: Not to Scale

Revision: A Date: January 2008

Note: this drawing is intended to illustrate the correct application of Interloc products only. All other elements are shown indicatively and are not intended to detail building construction.